

## Multi Zone Submittal Data

Indoor: **CS-ME7RKUA**

Wall Mounted Multi System Indoor Unit

Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_

Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit#: \_\_\_\_\_  
 Drawing#: \_\_\_\_\_

General Data	
Power (V/P/Hz)	208 - 230/1/60
Circuit Ampacity (A)	15
Fuse Size, Max.(A)	15
Running Amps (A)	Cool 2.5 / Heat 3.7
Power Input (W)	Cool 500 / Heat 740



Indoor Unit	Cool/Heat
Fan type	Crossflow
No. Speeds	5 & Auto
No. Poles (RPM, High)	8 - 650/720
No. Motors (W)	1 40w
CFM (HI)	390/425
Operation Sound H/L	38/25
Coil Type	Aluminum Fin & Copper Tube
Fin Type - Pipe Type	Slit Fin
Rows - F.P.I	2 - 21
Drain Connection Size (in.)	3/4
<b>Refrigerant</b>	<b>R410A</b>
Line Size (in. O.D. Discharge)	1/4" (Flare)
Line Size (in. O.D. Discharge)	3/8" (Flare)
<b>Dimensions (HxWxD)</b>	
Indoor Unit (Uncrated) (in.)	11-7/16 x 34-9/32 x 8-7/16
<b>Weight</b>	<b>N/A</b>
Net, Indoor (lbs.)	20


Performance Data @ ARI Standard Conditions (230V)	
<b>Cooling</b>	
Total Capacity (BTU/H)	6,900
Moisture Removal (HI, Pint/H)	0.6
<b>Heating</b>	
Total Capacity (BTU/H)	10,900

Features	
Controls	Microprocessor
Remote Controller	LCD Wireless Type, Temp.
Temperature Control	IC Thermostat
Timer	24 Hr. Program, 1 Hr. Off
Night Setback	Built-In
Air Louver, Vertical	Automatic
Power Failure Automatic Restart	Built-In
Self-Diagnosis	Built-In
Quiet Operation	Built-In
Air Filter	Washable, Anti-Mold

Accessories	
Refrigerant Line Set	Available
Air duct Extension	N/A
Condensate Drain Pump	Standard
Hard Wired Remote Controller	Available
Non-Removeable Remote control Bracket	Available

Operating Range	Indoor Air Intake Temp
Cooling (Max)	Refer to Outdoor Unit Specification
Cooling (Min)	Refer to Outdoor Unit Specification
Heating (Max)	Refer to Outdoor Unit Specification
Heating (Min)	Refer to Outdoor Unit Specification

# Dimensions

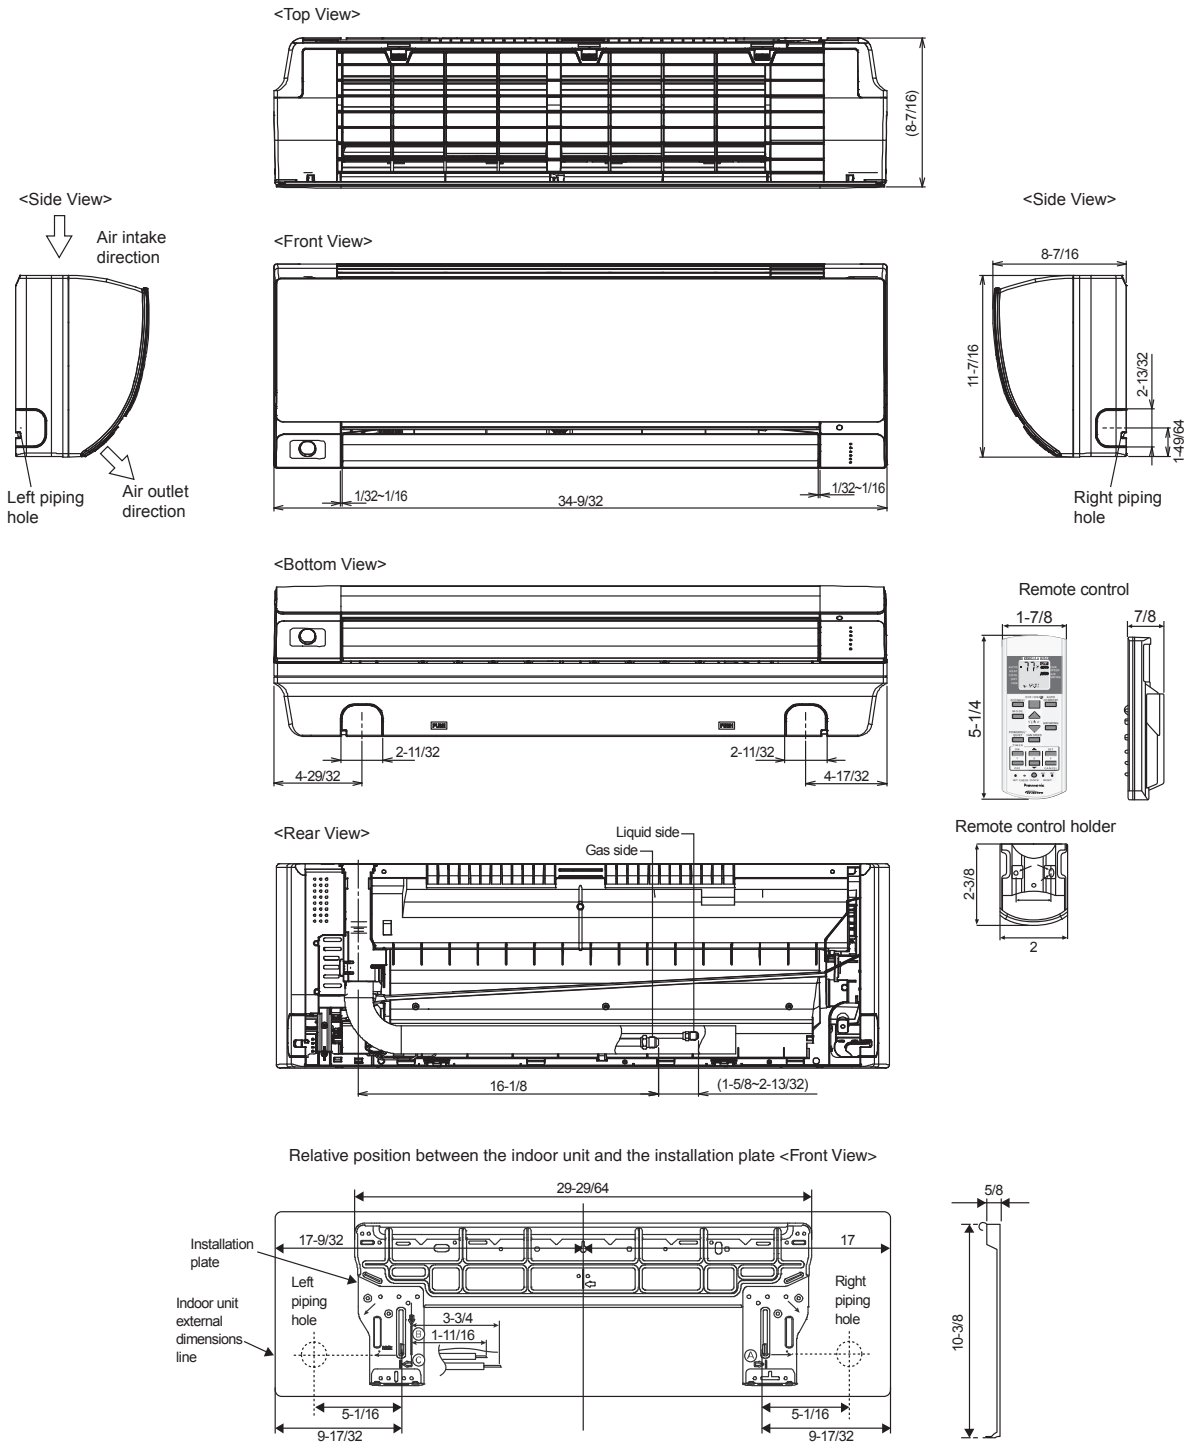

Unit: inch

